

CNOMO Based Solenoid, E13AXC Series



DESCRIPTION

Direct acting spring return normally closed solenoid, conforming to CNOMO standards.

Body material available in

- Aluminium (standard)
- Stainless Steel

FEATURES

- Direct mounting to all valves meeting CNOMO fixing dimensions
- Pilot exhaust dust caps fitted as standard

PRODUCT CODE:

E 1 3 A X C K

OPTIONS 1



0



0

VOLTAGE

OPTIONS 2



SEE BELOW FOR
PRODUCT CODE
DETAILS

Any of the below options that
are not required enter '0' in
relevant box.

Options 1

- C** Lever manual override
- D** Push button manual override
- S** Screw driver override
- 0** No option required

Standard Voltage


- B** 24v DC
- R** 24v AC (50/60 Hz)
- T** 110v AC (50/60 Hz)
- N** 220v AC (50/60 Hz)
- U** 240v AC (50/60 Hz)

Options 2

- S** Valve body stainless steel (1)

Note:
(1) Brass Stem Only

DIMENSIONS (mm)

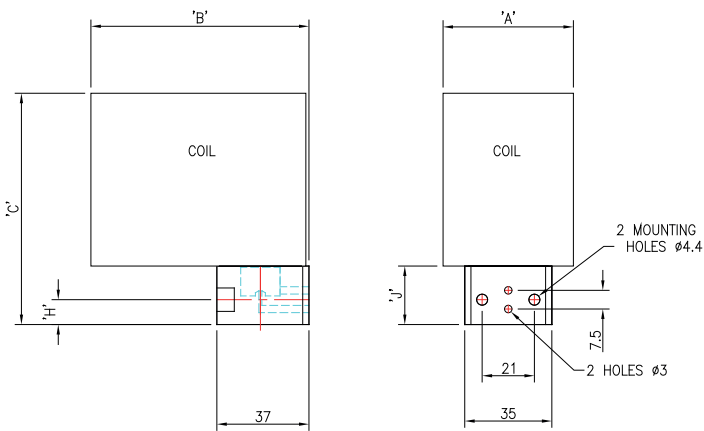

COIL TYPE	A	B	C	H	J
MC30 Plug & Socket	30	65	58	11.5	24

MATERIAL SPECIFICATIONS

	STANDARD
Body	Natural Anodised Aluminium (Dural)
Jet	Brass

VALVE SPECIFICATIONS

	STANDARD
Working Pressure	0 to 10 bar
Cv Factor	0.06 (0.04 Intrinsically safe coil)
Flow Rate (at 6 bar with 1 bar pressure drop)	62 l/min 42 l/min (Intrinsically safe coil)
Maximum Ambient Temperature	+80 °C
Minimum Working Temperature	-20 °C

COIL DETAILS

Coil Type	Plug & Socket
Area Class	Safe
Area Category	N/A
Ingress Protection	IP65
Cable Entry	PG.9
Ambient Temperature	-20 to +80 °C
Magnetic Wire Class	H